



## BASIC MECHANISM AND GONGS

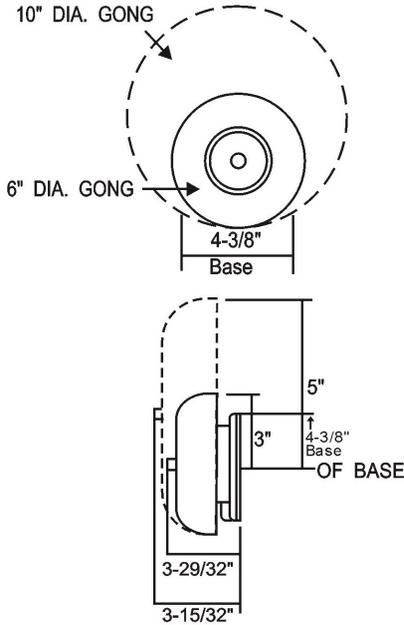


## SEMI-FLUSH INSTALLATION

WATERPROOF BACK BOX (FOR OUTDOOR USE) (OPTIONAL)

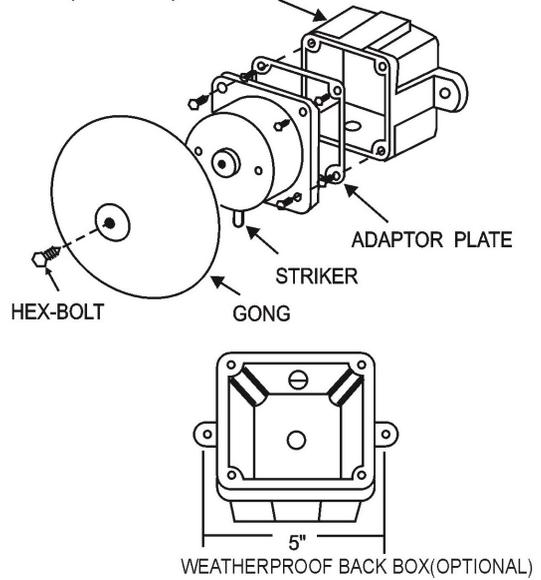

	6" Fire Alarm Bell	10" Fire Alarm Bell
Model	B6-24	B10-24
Voltage	24VDC	24VDC
Current	100mA	100mA
dB at 10ft	96dB	96dB

## WIRING (REAR VIEW)

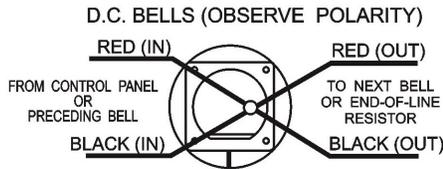

**CAUTION:**  
WHEN ELECTRICAL SUPERVISION IS REQUIRED USE IN AND OUT LEADS AS SHOWN.

- NOTES:**
- 1.OBSERVE POLARITY TO RING D.C. BELLS.
  - 2.RED WIRES POSITIVE (+)
  - 3.BLACK WIRES NEGATIVE (-)

## INSTALLATION NOTE

- 1.Remove a gong
- 2.Wire the bell in the circuit.
- 3.Mount bell mechanism on 4" square standard outlet box with the striker facing down.
- 4.Replace a gong
- 5.The bell must be mounted a minimum of 8ft., above the floor, or, as close to the ceiling as possible.
- 6.Polarized bell provides Red(+) and Black(-) lead wires. When you install the bell, observe the polarity.