


HAVSM SYNCHRONIZATION CONTROL MODULE

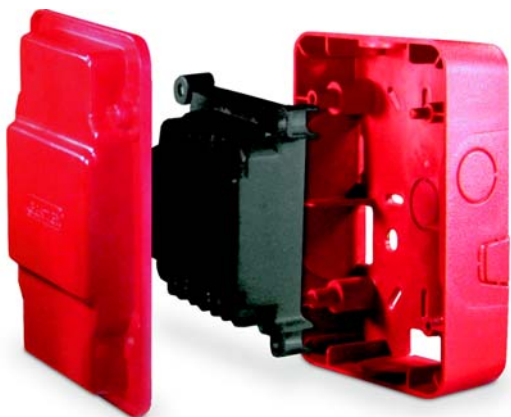

HAVSM

APPLICATIONS

The HAVSM control modules are designed to provide an easy way to synchronize multiple horns as well as strobe light flashes using only two wires in instances where a synchronized flash is required.

When the module is in temporal 3 mode, it has the capability to synchronize multiple horn signals and the ability to silence the horn while allowing the strobes to continue to flash. In unison mode, the horn cannot be silenced while maintaining strobe operation.

STANDARD FEATURES

- Synchronize Horn and Strobe with the use of only two wires
- Module is Rated for 3 Amps Continuous Current and 5 Amps Surge or Inrush Current
- Synchronizes to 1Hz Flash Rate
- Operates 1 "Class A" circuit or 2 "Class B" circuits at 3 Amps per Circuit
- Dual Synchronization Module Only when Using "Class B" circuits
- A Green LED status indicator
- Option to Silence the Horn while Strobes continue to Flash when using Temporal 3 Mode
- HAVSM Operates the HCS/HCC, HES3-24/HEC3-24, HES3-12/HEC3-12, HEC/HES/HEH, HSSPK Series and HX93 Series.
- HAVS module come with its own back box and cover plate
- Dimensions of Module: 3.85"H x 3.82"W x 1.32"D
- Dimensions of Box: 5.57"H x 4.55"W x 2.39"D
- Available in Fire Alarm Red or Off-White.

HAVSM SYNC CONTROL MODULE

Model Number	Part Number
HAVSM-R	0500-06340
HAVSM-W	0500-06350

Model Designations:

R = Red faceplate W = Off-white faceplate

Operating temperature - Indoor Use Only

Indoor: 32°to 120°F (0° to 49° C)



- UL 464 & UL 1971 Listed - S8369
- CSFM Listed - 7125-0410:0188

Product Compliance

- NFPA 72

HAVSM Current Ratings	
12VDC	27mA
12VDC UL Max	31mA
24VDC	37mA
24VDC UL Max	45mA

Specifications subject to change without notice.

Hochiki America Corporation

7051 Village Drive, Suite 100 Buena Park, CA 90621-2268

Phone: 714/522-2246 Fax: 714/522-2268

Technical Support: 800/845-6692 or technicalsupport@hochiki.com

Find latest revision at www.hochiki.com



F0131 09/2011