

## DCP-CZM CONVENTIONAL ZONE MODULE



### DESCRIPTION

The Hochiki Conventional Zone Module (DCP-CZM) is designed for use on an analog addressable Fire Alarm system. Up to 127 devices can be placed on a single SLC loop. The device address is uniquely stored on an onboard EEPROM. The module allows the panel to interface and monitor two-wire conventional detectors or pull stations. Each DCP-CZM transmits the status on one zone of devices (25 maximum per zone) back to the panel. It supervises the power supply as well as the entire zone of devices. Status conditions are reported as normal, open or alarm. All 2-wire smoke detectors must be UL listed as compatible to be interfaced with the DCP-CZM. The interrupt driven Digital Communication Protocol (DCP) combines maximum communication reliability and fast response to emergency conditions. The module has a single bicolored LED to indicate device status. It fits into a standard 4" square or double gang electrical back box.

### STANDARD FEATURES

- UL 864 9th Edition Listed
- Provides an addressable point for a zone of up to 25 conventional smoke detectors
- Blinks green when being polled by the fire panel. Latches on red when activated (controlled by panel)
- Device address can be programmed with a handheld programmer. Device address- ranges from 1 to 127
- Compatible with Class A and Class B wiring
- Auxiliary power source required to provide power for the zone of detectors
- Compatible with conventional smoke detectors, SOE-24V, SOE-24H, SOC-24V, SOC-24VN, SLV, SLR, SLK, SIH, SIJ, and conventional heat detectors, DCD, DFE, and DSC

### SPECIFICATIONS

Supply Voltage (S-SC)	25.3 ~ 39 VDC
Auxiliary Supply Voltage	18.8 ~ 27.2 VDC
Average Current Consumption (On S-SC Line)	670µA
2-Wire Detector Loop Current	2mA Maximum, Standby. 60mA Maximum, Alarm
Maximum Output Current	2Amps @ 30vdc
EOL Device	4.7K ohms Resistor
Max. Quantity Per Loop	127
Alarm Threshold Level	<1.5K ohms
Wiring Threshold Level	>2.5K ohms & <6K ohms
Open Circuit Threshold Level	>10K ohms
Max. 2-Wire Conventional Detector (Loop Resistance)	50 ohms (total wire length)
Visual Indicator	Bi-color LED, Green & Red
Operating Temperature	32°F (0°C) ~ 120°F (49°C)
Storage Temperature	-22°F (-30°C) ~ 158°F (70°C)
Relative Humidity	90% RH Non-Condensing
Dimensions	4.2"W x 4.7"H x 1.4"D
Weight	Approximately 3oz
Mounting	4" square electrical box

### PRODUCT LISTINGS



California State  
Fire Marshal  
7300-0410:150


Specifications subject to change without notice.

Continued on back.

## DCP-CZM CONVENTIONAL ZONE MODULE

### ENGINEERING SPECIFICATIONS

The contractor shall furnish and install where indicated on the plans, Conventional Zone Module (DCP-CZM). The modules shall be UL Listed and compatible with the Hochiki America Control Panel Protocol. The device address shall be electrically programmed and stored in EEPROM. A bi-colored LED shall indicate device status. The DCP-CZM shall be supplied with a plastic cover and shall be suitable for mounting to a 4" square or double gang electrical back box. The DCP-CZM shall provide a monitor LED that is visible from outside the cover plate.

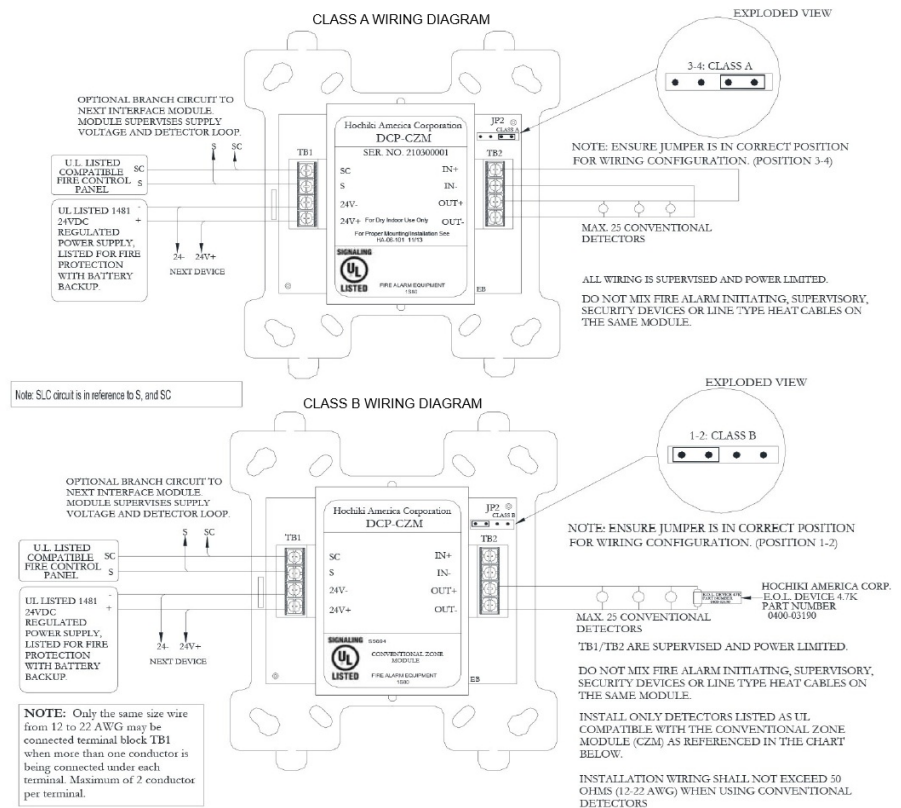

### Compatible Two Wire Detectors for use with the CZM with zone identifier A:

Detector Model	Detector Identifier	Detector Type	Base Model	Base Identifier	Max Detectors
SOE-24V, SOE-24H, SOC-24V, SOC-24VN	HD-3	Photoelectric	NS4 and NS6 series -100, -220, -221, -224, HSC-220R, HSC-224R	HB-3, HB-4, HB-5, HB-55, HB-72, HB-73	25
SLK24F	HD-3	Photoelectric	HSB-224	HB-53	25
SIH-24F	HD-3	Ionization	HSB-224	HB-53	25
SIH-24F	HD-3	Ionization	HSB-220	HB-56	25
SLR-24H	HD-3	Photoelectric w/heat	NS4-224, NS6-224	HB-5	25
SLR-24H	HD-3	Photoelectric w/heat	NS4-220, NS6-220	HB-3	25
SLR-24V	HD-3	Photoelectric	NS4-224, NS6-224	HB-5	25
SLR-24V	HD-3	Photoelectric	NS4-220, NS6-220	HB-3	25
SLR-835 /-835W	HD-3	Photoelectric (8-35V)	NS4-224, NS6-224, NS4-224W, NS6-224W	HB-5	18
SLR-835 /-835W	HD-3	Photoelectric (8-35V)	NS4-220, NS6-220, NS4-220W, NS6-220W	HB-3	18
SLR-835H / -835HW	HD-5	Photoelectric (8-35V) w/heat	NS4-224, NS6-224, NS4-224W, NS6-224W	HB-5	18
SLR-835H / -835HW	HD-5	Photoelectric (8-35V) w/heat	NS4-220, NS6-220, NS4-220W, NS6-220W	HB-3	18
SLR-835B-2 / -2W	HD-6	Photoelectric (8-35V) (baseless)	N/A	N/A	18
SLR-835BH-2 / -2W	HD-6	Photoelectric (8-35V) w/heat (baseless)	N/A	N/A	18
SLV-24 / -24N / -24V	HD-3	Photoelectric	NS4-224, NS6-224, NS4-224W, NS6-224W	HB-5	25
SLV-24 / -24N / -24V	HD-3	Photoelectric	NS4-220, NS6-220, NS4-220W, NS6-220W	HB-3	25
DCD-135 / DCD-190	HD-3	Heat, Fixed Temperature	NS4-220, NS6-220	HB-3	25
DCD-135 / DCD-190	HD-3	Heat, Fixed Temperature	NS4-224, NS6-224	HB-5	25
DFE-135 / DFE-190	N/A	Heat, Fixed Temperature	HSC-220L, HSC-224L, NS4-100, NS6-100	HB-62, HB-64, HB-55	25
DSC-EA	N/A	Heat, Rate of Rise	HSC-220L, HSC-224L, NS4-100, NS6-100	HB-62, HB-64, HB-55	25